



# POLYBOARD ENVIRO 300

ZERO ODP EXTRUDED POLYSTYRENE INSULATION

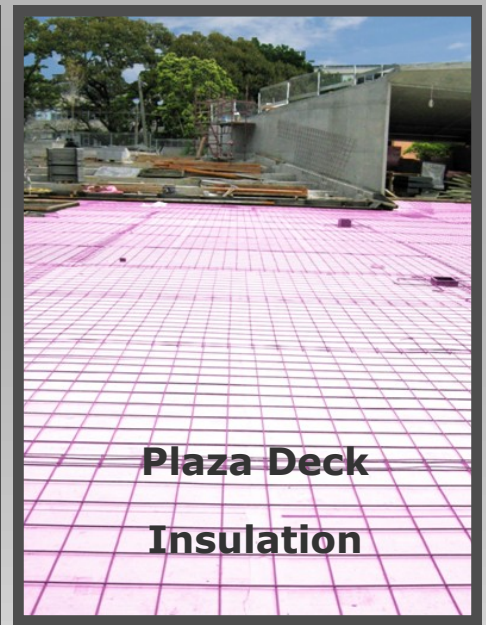

Traditional high performance properties of closed cell rigid board with the additional benefit of Zero Ozone Depletion Potential (ODP)

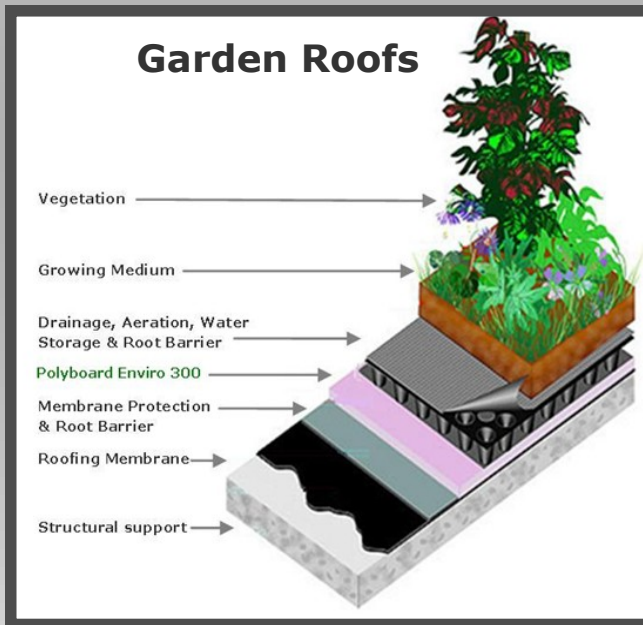

Polyboard Enviro 300 Technical Data	
Compressive Strength	300 KPA minimum
Density	35 Kg/m <sup>3</sup>
Thermal Conductivity	0.033 w/mK
Thermal Resistance	50mm = R1.56, 75mm = R2.34
Water Absorption	>0.2% by volume
Thickness	25-100 mm
Sheet Size	2450 x 600
Fire Rating	B2
Blowing Agent	C02

For Technical Information, Contact Mike Nagle - 0417 268 880  
[mnagle@austech.com.au](mailto:mnagle@austech.com.au) • [www.austech.com.au](http://www.austech.com.au)

NSW • QLD • VIC • WA • TAS • NZ