



## compactus®

### INTRODUCTION

Freetrack 2 is the ideal light-weight Compactus system for just about any storage and filing application. The lighter weight of the system reduces the chance of operator strain and loads imposed on the floor. But just because Freetrack 2 is lighter than other systems this doesn't mean it isn't built tough. Move block-loads up to 1000kg effortlessly with Freetrack 2 Compactus. Freetrack 2 systems are easier and far more cost effective to install, relocate or reconfigure than standard fixed-track systems.

Easily up-grade from Ultima static shelving systems to any of the three Freetrack 2 Compactus systems.

### FEATURES

- Robust aluminium anodised components provides strength and a streamline finish that constitutes to a modern attractive appearance
- Low profile track incorporates pivoting ramps that follow the floor contour to reduce trip hazards and provide trolley and wheelchair access
- Universal designed runner allows various double-sided bay combinations
- Crinolin steel strips provide hard wearing runner surface for smooth operating
- Design the perfect solution with unlimited base lengths
- A lighter weight system reduces operator strain and loads imposed on the floor
- Tracks do not require fixing eliminating any damage to floor coverings
- Track and runner combinations add only 65mm to the overall shelving height

### TECHNICAL SPECIFICATIONS

Drive Type Manual

Shelving & Accessory System Ultima CI-80

Maximum System Width 1800 mm

Shelving Width (Bay Width)  
750 mm  
900 mm  
1050 mm  
1200 mm

Shelving Depth  
250 mm  
300 mm  
400 mm  
450 mm  
500 mm  
600 mm

Shelving Height  
975 mm  
1875 mm  
2175 mm  
2400 mm

Overall System Heights  
1040 mm  
1940 mm  
2240 mm  
2465 mm

Maximum Bay Carrying Capacity 500 kg

Maximum Movable Block Load 1000 kg

Standard Colour\* Stone White

Warranty 10 Years

## SHELF LOADS

Ultima CI-80 standard unbraced shelves have the following maximum load rating. These ratings are based on an uniformly distributed load.

Shelf Width (mm)	Shelf Depth (mm)					
	250	300	400	450	500	600
750	130kg	130kg	115kg	115kg	115kg	115kg
900	130kg	130kg	115kg	115kg	115kg	115kg
1050	80kg	80kg	80kg	80kg	100kg	100kg
1200	80kg	80kg	80kg	80kg	100kg	100kg

\*These load ratings can be increased by adding our shelf stiffeners. Achieve up to 240kg shelf loads.

If the shelving is being used for paper filing the figures below may be used as a guide to the actual load of the contents.

Shelf Width (mm)	Average Weight (kg)	Max Weight (kg)
750	25kg	37.5kg
900	30kg	45kg
1050	35kg	52.5kg
1200	40kg	60kg

## OTHER

**Accessories**

- Ultima Shelf - Slotted
- Ultima Shelf - Plain
- Slotted Shelf Divider
- Plain Shelf Divider
- Filing Rack - Suspended
- Filing Rack - Wrap Around
- Roll Out File Frame
- Roll Out Media Drawer
- Roll Out Reference Shelf
- Hanging File Chassis

\*Please refer to the Dexion Office Colour Selector for a selection of available powder coat colours.


## FLOOR LOADS

Please contact your Dexion Office representative for information relating to point loads exerted by the wheels on the tracks.

## OVERALL DIMENSIONS

### Overall Unit Depth

Manually operated units have standard tracks on the front and rear of the unit. Standard tracks add 44mm per side to the nominal bay dimension. In installation, it is advised that the unit closest to a wall has a 50mm clearance away from the wall.

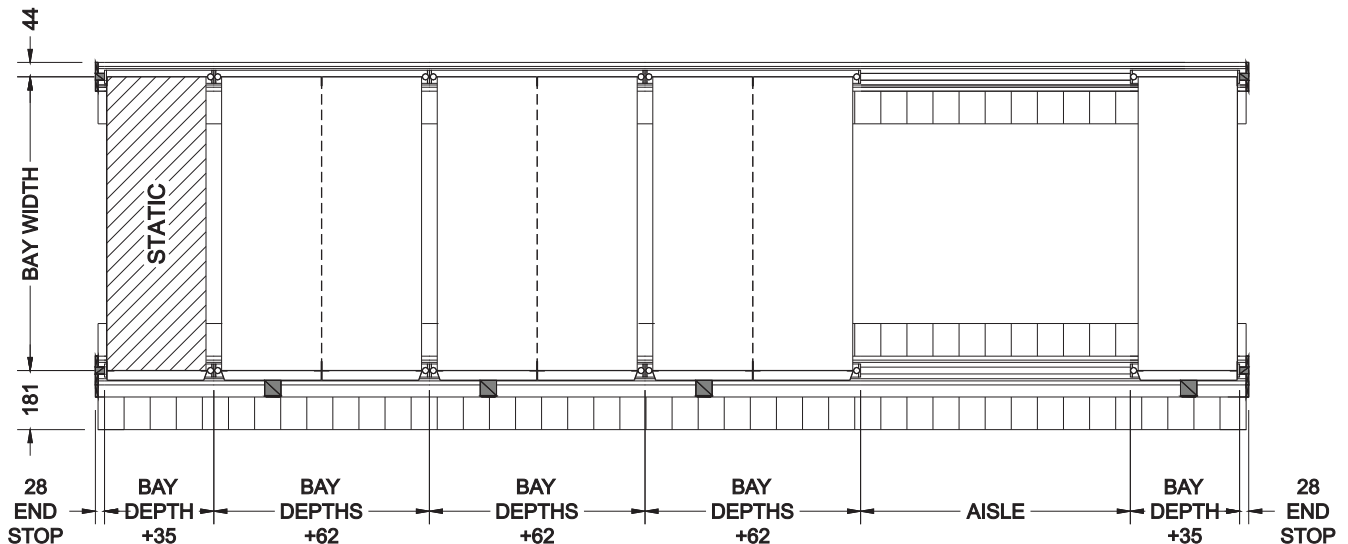

### Overall Unit Length

Tracks are manufactured in standard 3m lengths and cut to suit the precise floor space that is available. Generally, an individual unit should not exceed 9000m in length.

## ENQUIRIES

For contact details, visit  
[www.dexionoffice.com.au](http://www.dexionoffice.com.au)  
 Or call 1300 180 358

Ultima®, Compactus®, Freetrack® & Mekdrive® are registered trademarks.