


PLEXIGLAS RESIST®
Solid Sheets

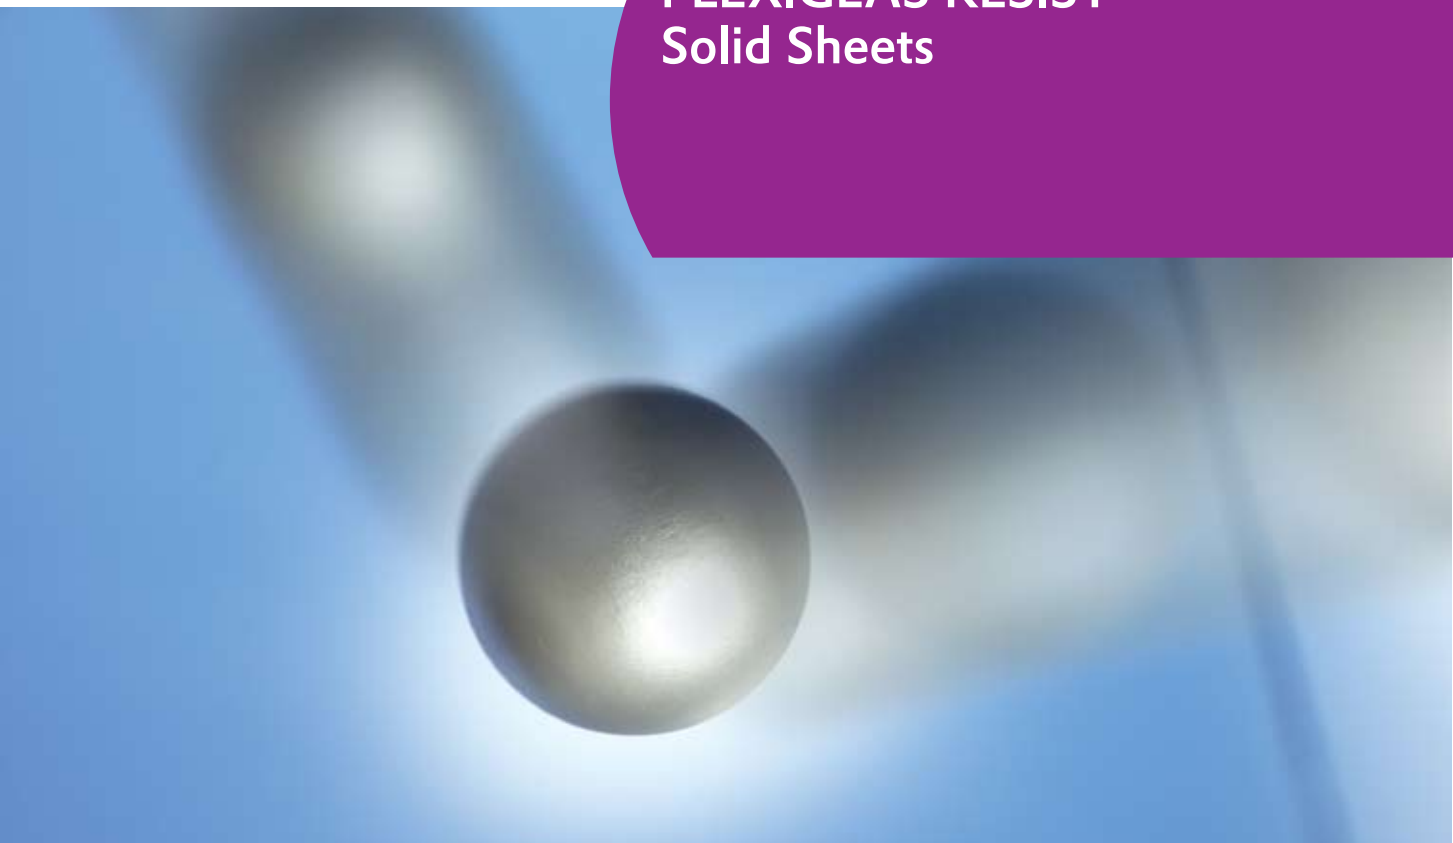

PLEXIGLAS RESIST®

A Successful Synthesis

PLEXIGLAS RESIST® sheets are high-quality, solid plastics sheets extruded from impact-modified acrylic (PMMA). They combine the excellent product properties of PLEXIGLAS® with the toughness of polycarbonate.

Instead of having to choose between WEATHER-RESISTANT **or** TOUGH, PLEXIGLAS RESIST® offers you a product that is both WEATHER-RESISTANT **and** TOUGH.



tough
highly transparent
brilliant
weather-resistant

Cost-Cutting Potential Through Custom-Tailored Solutions

Impact Strength Made to Order

PLEXIGLAS RESIST® 45 offers three times the break resistance of conventional PLEXIGLAS® XT.

Compared to polycarbonate, PLEXIGLAS RESIST® 100 provides the same fracture test results, usually at a more advantageous cost.

For certain applications, the impact strength of PLEXIGLAS RESIST® 65** and PLEXIGLAS RESIST® 75 is quite sufficient: This gives you customized solutions with further cost-cutting potential.

PLEXIGLAS RESIST®: Customized impact strength and toughness

Impact strength*



*) Charpy impact strength



***) Example: Protection of spectators in ice hockey stadiums

PLEXIGLAS RESIST® passes the puck resistance test (test certificate 46/901 869/Sm/C, FMPA, University of Stuttgart) **at a thickness of only 6 mm.**

This is an application for which only polycarbonate has so far been used, and then only in a comparable thickness, or non impact-modified acrylic in greater thicknesses.

Apart from the product benefits, all glazing experts will recognize the product advantages this represents, as well as the clear cost advantage (depending on supplier) offered by PLEXIGLAS RESIST® 65.

It's well worth comparing products and prices!

PLEXIGLAS RESIST®

Applications



Protective Glazing

of a general nature, such as access protection and protective housings for machines and equipment

- optimum impact strength
- cost-effective
- a real alternative to polycarbonate
- highly transparent
- good chemical resistance
- high surface hardness



Structural Glazing Outdoors

for bus shelters, bicycle parking areas and canopies

- highly weather-resistant and durable
- cold-curvable and thermoformable
- brilliant and highly transparent
- inexpensive; no additional UV protection needed (for example, for PC or PET-G)



P.O.P. Displays and Sales Stands

for high-value merchandise

- brilliant and tough
- readily bondable
- thermoformable
- suitable for laser cutting and edge polishing



Signage

for example, advertising signs, signboards, outdoor advertising pillars and vending machine glazing

- tough and resistant to vandalism
- permanently colorfast
- highly weather-resistant
- good bondability and processability

Versatility for Professional Applications:

The unique combination of excellent mechanical, thermal and chemical properties makes PLEXIGLAS RESIST® a versatile, absolutely reliable material.



Glazing for Shop Fittings and Counters

in shopping centers, hotels and catering areas

- safe for food-contact applications (FDA approval)
- brilliant
- good chemical resistance, resistant to most household cleaners
- suitable for laser cutting and edge polishing



Vehicle Glazing

for utility vehicles such as excavators and forklifts, for motorcycle and motor scooter windshields and interior glazing in buses and trains

- licensed as a material for vehicle construction to DOT/ABG
- thermoformable (without pre-drying)
- low forming temperatures (low energy costs)
- optimum impact strength
- high surface hardness
- maximum weather resistance



Partitions and Protective Screens

for example, for checkout areas in department stores and supermarkets

- individual impact strength
- high surface hardness
- brilliant
- highly transparent
- cost-effective
- a real alternative to polycarbonate

PLEXIGLAS RESIST®

Technical Data/Sales Range

Property Comparison


	PLEXIGLAS®XT	PLEXIGLAS RESIST® 45	PLEXIGLAS RESIST® 65	PLEXIGLAS RESIST® 75	PLEXIGLAS RESIST® 100	Polycarbonate	PETG
Charpy impact strength (kJ/m ²)	15	45	65	75	no fracture	no fracture	no fracture
Elastic modulus (MPa)	3300	2700	2200	2000	1800	2300	2100
Light transmission τ_{D65} (%)	92	91	91	91	91	88	88

Typical values only

Standard Sales Range/Sheet size: 3050 x 2050 mm

	Sheet thicknesses in mm					
	2	3	4	5	6	8
Colorless						
PLEXIGLAS RESIST® 45 PLEXIGLAS RESIST® 65 PLEXIGLAS RESIST® 75 Sheets per standard pallet	40	40	30	25	20	15
PLEXIGLAS RESIST® 100 Sheets per standard pallet		40	30	25	20	15
White						
PLEXIGLAS RESIST® 65 Sheets per standard pallet		40	30	25		

Special range: greater lengths, colors, other sizes, other degrees of impact strength, thicknesses up to 20 mm.

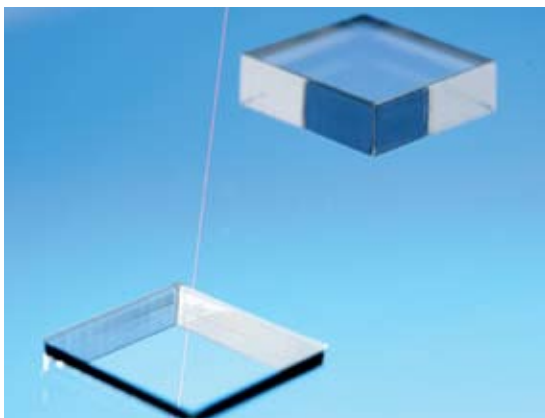

Processing Advantages

PLEXIGLAS RESIST® can be processed like conventional PLEXIGLAS®. With its array of processing options, it affords substantial advantages over other impact-modified plastics products.

- easy to cut, drill and mill
- lends itself to laser cutting and
- edge polishing
- easy to bond
- thermoformable (without predrying)
- low forming temperatures
- cold-curvable

Overview of Major Properties

We classify the comparative major properties of relevant plastics as follows:

	PLEXIGLAS				Polycarbonate		PETG		PET		
	PLEXIGLAS® XT	RESIST® 45	RESIST® 65	RESIST® 75	RESIST® 100	without UV protection	with UV protection	without UV protection	with UV protection	without UV protection	with UV protection
Impact strength	▲	▲▲	▲▲ ▲	▲▲ ▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲	▲▲ ▲
Weather resistance	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲	▲▲ ▲	▲	▲▲	▲	▲▲
Brilliance	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲	▲▲	▲▲ ▲	▲▲	▲▲	▲▲
Rigidity	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲
Chemical resistance	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲
Surface hardness	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲	▲▲	▲▲	▲▲	▲▲	▲▲	▲▲	▲▲
Suitability for laser cutting (CO ₂)	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲	▲▲ ▲	-	-	▲▲ ▲	▲▲ ▲	-	-
Bonding	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲	▲
Thermoforming	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲	▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲
Food-contact approval	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	*	-	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	-
Price/performance ratio	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲ ▲	▲▲	▲

*only special grade

® = registered trademark

PLEXIGLAS and PLEXIGLAS RESIST,
are registered trademarks of
Evonik Röhm GmbH, Darmstadt, Germany.

Certified to DIN EN ISO 9001 (Quality)
and DIN EN ISO 14001 (Environment)

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

Ref. No. 432-6 May 2008
xx/0508/09608 (en)



EVONIK
INDUSTRIES

Business Unit
Performance Polymers

Evonik Röhm GmbH
Kirschenallee
64293 Darmstadt
Germany

info@plexiglas.net
www.plexiglas.net
www.evonik.com

Evonik. Power to create.