
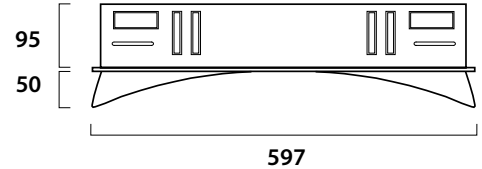





Officelyte Air Handling

- Recessed lay-in
- Ceiling frame accessories for plasterboard installation
- 1x55W TCL, 2x24W T16 + 1 x 80W TCL options
- Exceptionally low glare, under 1500 cd/m² at and above 65°
- Standard electronic and dimmable versions
- Unique patented design incorporating satin prismatic wings and a Conical De-glaring Prism (CDP) centre panel
- IP40 for reduced dust ingress
- Slot-in wing design allows for quick and simple installation, maintenance and cleaning
- Removable, dedicated, air-extract panels
- Up to 40 litres/sec extraction
- Knock outs in body, for system balance



Removal of these SMALL panels will reduce the pressure drop in the ceiling plenum and may be used to balance systems.

MAIN Slots

Volume Rate (ls-1)	Velocity (ms-1)	Pressure Drop (Pa)
38.5	5	12
29.1	3.8	7.5
16.6	2.5	2.5

MAIN Slots + 4 SMALL Panels



Volume Rate (ls-1)	Velocity (ms-1)	Pressure Drop (Pa)
39.3	5	11
29.1	3.8	6
20.4	2.5	2.5

MAIN Slots + 8 SMALL Panels

Volume Rate (ls-1)	Velocity (ms-1)	Pressure Drop (Pa)
40.1	5	11
29.8	3.8	6
18.8	2.5	2

(ls-1) = Litres per Second
(ms-1) = Metres per Second
(Pa) = Pascals

595

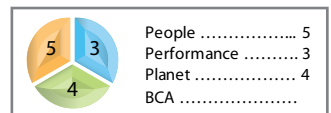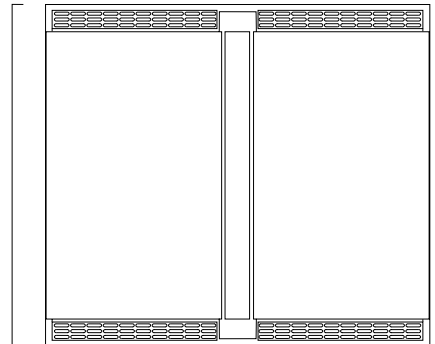

Order Codes	Dimensions	Weight	STD	DALI	1-10V
Officelyte Air Handling					
1x55W TC-L	597 x 595 x 95	5.6kg	2041215	2041215DALI	20412151-10
2x24W T16	597 x 595 x 95	5.7kg	2041219	2041219DALI	20412191-10
1x80W T16	597 x 595 x 95	5.7kg	2042749	2042749DALI	20427491-10

- Accessories see page: 8
- **Emergency options available upon request**