
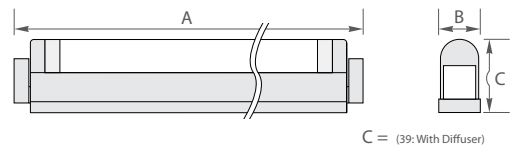


# SlimDim

## T5

- Integrated “plug and play” dimmable connecting system and built in ballast
- Consists of an electronic fixture, fluorescent lamp and a clear polycarbonate diffuser. All double insulated with an IP21 rating
- Streamline design offers great lighting solutions for art galleries and museums, foyers, offices, hotels, cafes, restaurants, meeting rooms, cabinetry details and retail applications

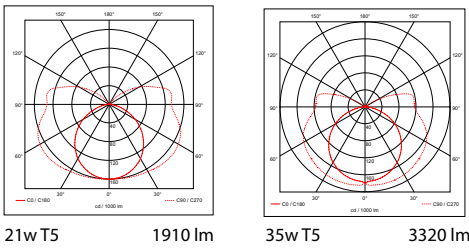

### Accessories



Direct Connecting Cap




Powercord 1800mm with plug and straight connector



Bus Wire

For SlimDim Accessories refer to page 440

### Mounting Application

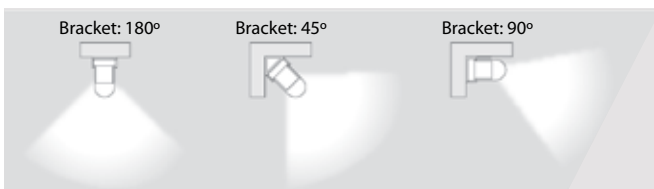

Cat No.	Lamp Temp	Length- A	Width- B	Height- C
<b>SlimDim T5</b>				
<b>SLDT5- 14W3K</b>	SlimDim T5 14w	3K	595 x 24	37
<b>SLDT5- 14W3KD</b>	SlimDim T5 14w with Diffuser	3K	595 x 24	39
<b>SLDT5- 14W4K</b>	SlimDim T5 14w	4K	595 x 24	37
<b>SLDT5- 14W4KD</b>	SlimDim T5 14w with Diffuser	4K	595 x 24	39
<b>SLDT5- 14W6K</b>	SlimDim T5 14w	6K	595 x 24	37
<b>SLDT5- 14W6KD</b>	SlimDim T5 14w with Diffuser	6K	595 x 24	39
<b>SLDT5- 21W3K</b>	SlimDim T5 21w	3K	895 x 24	37
<b>SLDT5- 21W3KD</b>	SlimDim T5 21w with Diffuser	3K	895 x 24	39
<b>SLDT5- 21W4K</b>	SlimDim T5 21w	4K	895 x 24	37
<b>SLDT5- 21W4KD</b>	SlimDim T5 21w with Diffuser	4K	895 x 24	39
<b>SLDT5- 21W6K</b>	SlimDim T5 21w	6K	895 x 24	37
<b>SLDT5- 21W6KD</b>	SlimDim T5 21w with Diffuser	6K	895 x 24	39

# SlimDim

## T5

Cat No.		Lamp Temp	Length- A		Width- B		Height- C
<b>SLDT5-28W3K</b>	SlimDim T5 28w	3K	1195	x	24	x	37
<b>SLDT5-28W3KD</b>	SlimDim T5 28w with Diffuser	3K	1195	x	24	x	39
<b>SLDT5-28W4K</b>	SlimDim T5 28w	4K	1195	x	24	x	37
<b>SLDT5-28W4KD</b>	SlimDim T5 28w with Diffuser	4K	1195	x	24	x	39
<b>SLDT5-28W6K</b>	SlimDim T5 28w	6K	1195	x	24	x	37
<b>SLDT5-28W6KD</b>	SlimDim T5 28w with Diffuser	6K	1195	x	24	x	39
<b>SLDT5-35W3K</b>	SlimDim T5 35w	3K	1495	x	24	x	37
<b>SLDT5-35W3KD</b>	SlimDim T5 35w with Diffuser	3K	1495	x	24	x	39
<b>SLDT5-35W4K</b>	SlimDim T5 35w	4K	1495	x	24	x	37
<b>SLDT5-35W4KD</b>	SlimDim T5 35w with Diffuser	4K	1495	x	24	x	39
<b>SLDT5-35W6K</b>	SlimDim T5 35w	6K	1495	x	24	x	37
<b>SLDT5-35W6KD</b>	SlimDim T5 35w with Diffuser	6K	1495	x	24	x	39

### SlimDim T5 High Output (HO)

<b>SLDT5-24W3K</b>	SlimDim T5 24w	3K	595	x	24	x	37
<b>SLDT5-24W4K</b>	SlimDim T5 24w	4K	595	x	24	x	37
<b>SLDT5-24W6K</b>	SlimDim T5 24w	6K	595	x	24	x	37
<b>SLDT5-39W3K</b>	SlimDim T5 39w	3K	895	x	24	x	37
<b>SLDT5-39W4K</b>	SlimDim T5 39w	4K	895	x	24	x	37
<b>SLDT5-39W6K</b>	SlimDim T5 39w	6K	895	x	24	x	37
<b>SLDT5-54W3K</b>	SlimDim T5 54w	3K	1195	x	24	x	37
<b>SLDT5-54W4K</b>	SlimDim T5 54w	4K	1195	x	24	x	37
<b>SLDT5-54W6K</b>	SlimDim T5 54w	6K	1195	x	24	x	37

### SlimDim Accessories

<b>SLDT5-BKT45</b>	SlimDim T5 Bkt Mount 45 degrees
<b>SLDT5-BKT90</b>	SlimDim T5 Bkt Mount 90 degrees
<b>SLDT5-BKTSTD</b>	SlimDim T5 Bkt Mount Standard
<b>SLDT5-BWOL0080</b>	SlimDim T5 Buswire O/Lap 80mm
<b>SLDT5-BW0150</b>	SlimDim T5 Buswire 150mm
<b>SLDT5-BW0300</b>	SlimDim T5 Buswire 300mm
<b>SLDT5-BW0600</b>	SlimDim T5 Buswire 600mm
<b>SLDT5-BW01200</b>	SlimDim T5 Buswire 1200mm
<b>SLDT5-BW01800</b>	SlimDim T5 Buswire 1800mm
<b>SLDT5-BWOL3000</b>	SlimDim T5 Buswire O/Lap 3 metres
<b>SLDT5-PC1800NP</b>	SlimDim T5 Power 1800 NP
<b>SLDT5-CONS1SYL</b>	SlimDim T5 Controller Single
<b>SLDT5-CONS2SYL</b>	SlimDim T5 Controller Twin
<b>SLDT5-BOOST2</b>	SlimDim T5 Booster Twin
<b>SLDT5-TRANS5YL</b>	SlimDim T5 Translator Sylvania
<b>SLDT5-1-10/PWM</b>	SlimDim T5 1-10v Translator Twin
<b>SLDT5-DC</b>	SlimDim T5 Direct Connector
<b>SLDT5-DEC</b>	SlimDim T5 Dead End Cap